


SHIFT CEILING

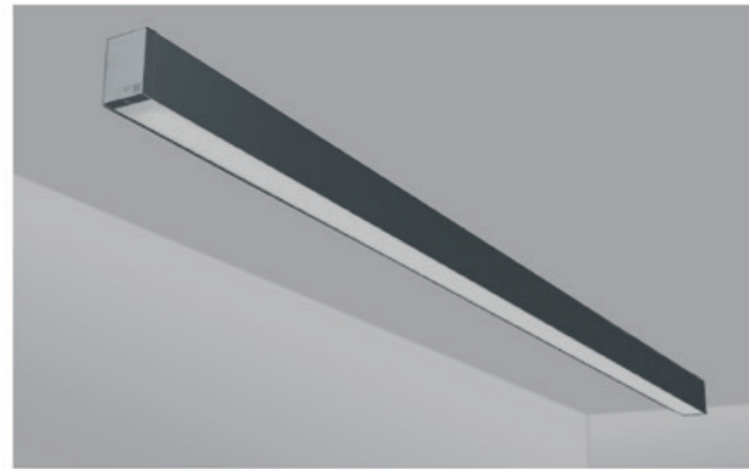


Application

Beautiful, slim LED luminaire that mounts directly to the ceiling. An aluminum housing with a matte anodized finish featuring the best in LED optic design. Shift is extremely versatile and its timeless design lends itself to a variety of applications: residential, commercial and healthcare.


Product Description

- Surface Ceiling Mount LED Luminaire
- Elegant and slim shape
- Aluminum Housing
- Replacable LED module
- Optical prism high transmittance PMMA diffuser
- 5 year warranty


Dimensions

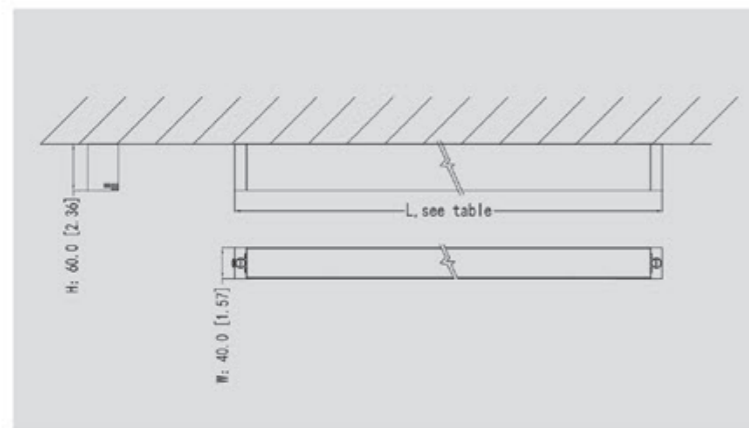


Dimension in millimetres [inches in brackets]
Tolerance: ±1mm [0.04"]

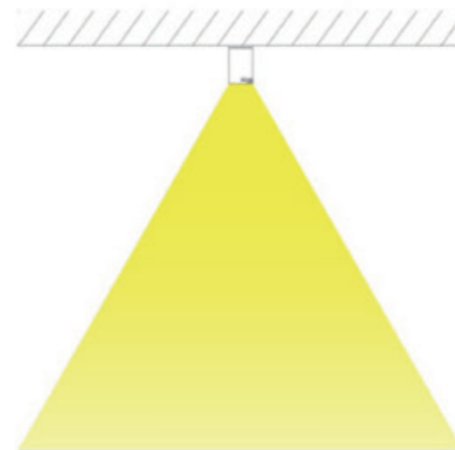

Distribution Flux Curve

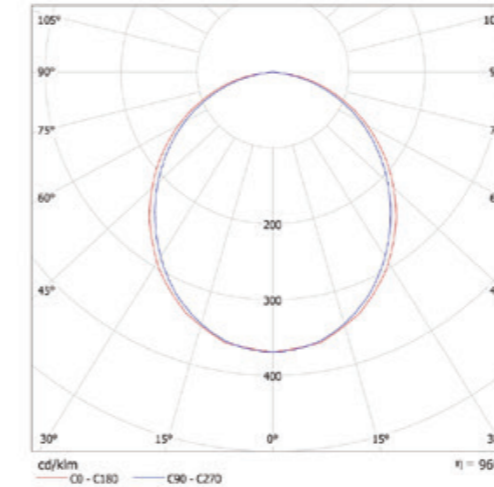

Linkable Option

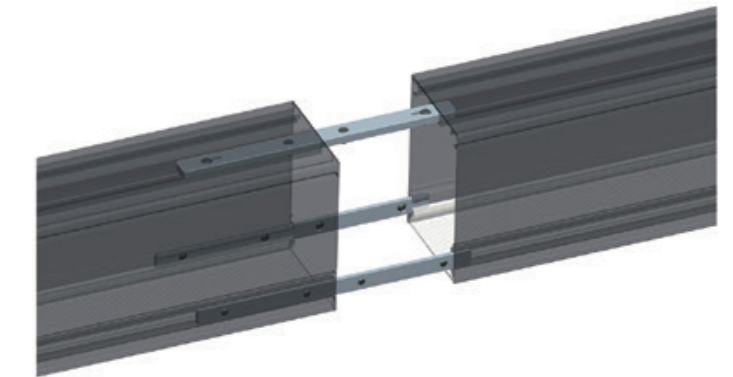

Technical Data

Model	Shift Ceiling	L70	60,000 hours
Light Source	SMD LED	IP Rating	IP20
Rated Life	50,000 Hours	Beam Angle	120°
Input Voltage / Power	120 - 240V AC / 15 - 30W	Dimming	1-10V, Switch and DALI available
Power Factor	0.90	Operating Temperature	-4°F to +122°F (-20°C to +50°C)
CRI / SDCM	90+ / 3-	Dimensions	L x 40mm x 60mm
L90	30,000 hours		L x 1.57" x 2.36"

Model	Wattage	Lumens		Weight kg [lbs]	* L, Length mm [inch]
		3000K	4000K		
01046060	15W	1,050	1,200	1.4 [3.1]	633 [24.92]
01049060	20W	1,400	1,600	1.7 [3.7]	933 [36.73]
01041260	25W	1,750	2,000	2.0 [4.4]	1233 [48.54]
01041560	30W	2,100	2,400	2.3 [5.1]	1533 [60.35]

* Custom lengths are available on request

Ordering Details

Model	Type	Size	Finish	CCT	Dimming
01 - Shift	04 - Ceiling	6060 - L: 633mm [24.92"] H: 60mm [2.36"] 9060 - L: 933mm [36.73"] H: 60mm [2.36"] 1260 - L: 1233mm [48.54"] H: 60mm [2.36"] 1560 - L: 1533mm [60.35"] H: 60mm [2.36"]	1 - Silver 2 - White 3 - Black	2 - 3000K 4 - 4000K	0 - Non-dimmable 1 - 1-10V Dimmable + Switch DIM 2 - DALI Dimmable