

SHIFT UP BESIDE DOWN

Application



Beautiful, slim LED luminaire that comes in many forms. Offered in a pendant, ceiling or wall luminaire. Housed in Aluminum with a matte anodized finish featuring the best in LED optic design. Shift is extremely versatile and it's timeless design lends itself to a variety of applications: residential, commercial and healthcare.

Product Description

- Wire Suspended LED Pendant Luminaire
- Elegant and slim shape
- Aluminum Housing
- Replacable LED module
- Optical prism high transmittance PMMA diffusor
- 5 year warranty



Dimensions

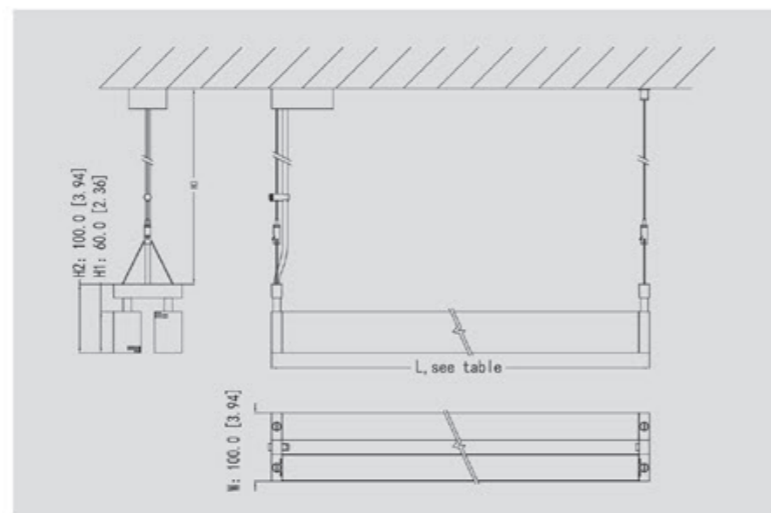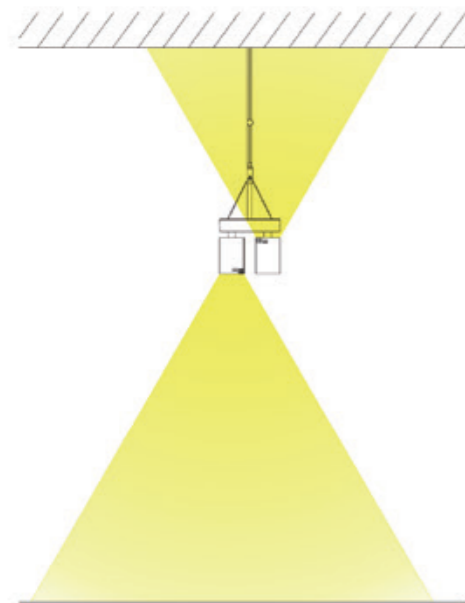

Dimension in millimetres [inches in brackets]
Tolerance: ±1mm [0.04"]

Technical Data

Model	Shift Up Beside Down	L70	60,000 hours
Light Source	SMD LED	IP Rating	IP20
Rated Life	50,000 Hours	Beam Angle	120°
Input Voltage / Power	120 – 240V AC/ 30 to 60W	Dimming	1-10V, Switch and DALI available
Power Factor	0.90	Operating Temperature	-4°F to +122°F (-20°C to +50°C)
CRI / SDCM	90+ / 3-	Dimensions	L x 100mm x 100mm (H3: 3000mm)
L90	30,000 hours		L x 3.94" x 3.94" (H3: 118.11")

Model	Wattage	Lumens		Weight	* L, Length
		3000K	4000K		
01086010	2 x 15W	2,100	2,400	2.8 [6.2]	633 [24.92]
01089010	2 x 20W	2,800	3,200	3.4 [7.5]	933 [36.73]
01081210	2 x 25W	3,500	4,000	4.0 [8.8]	1233 [48.54]
01081510	2 x 30W	4,200	4,800	4.6 [10.1]	1533 [60.35]

* Custom lengths are available on request

Ordering Details

Model	Type	Size	Finish	CCT	Dimming
01 - Shift	08 - Up Beside Down	6010 - L: 633mm [24.92"] H: 100mm [3.94"]	1 - Silver	2 - 3000K 4 - 4000K	0 - Non-dimmable 1 - 1-10V Dimmable + Switch DIM 2 - DALI Dimmable
		9010 - L: 933mm [36.73"] H: 100mm [3.94"]	2 - White		
		1210 - L: 1233mm [48.54"] H: 100mm [3.94"]	3 - Black		
		1510 - L: 1533mm [60.35"] H: 100mm [3.94"]			