

# SHIFT DOWN

## Application


Shift is a beautiful, slim LED luminaire that comes in many forms. Offered in a pendant, ceiling or wall luminaire. Housed in Aluminum with a matte anodized finish featuring the best in LED optic design. Shift is extremely versatile and its timeless design lends itself to a variety of applications: residential, commercial and healthcare.

## Product Description

- Wire Suspended LED Pendant Luminaire
- Elegant and slim shape
- Aluminum Housing
- Replacable LED module
- Optical prism high transmittance PMMA diffusor
- 5 year warranty




## Dimensions

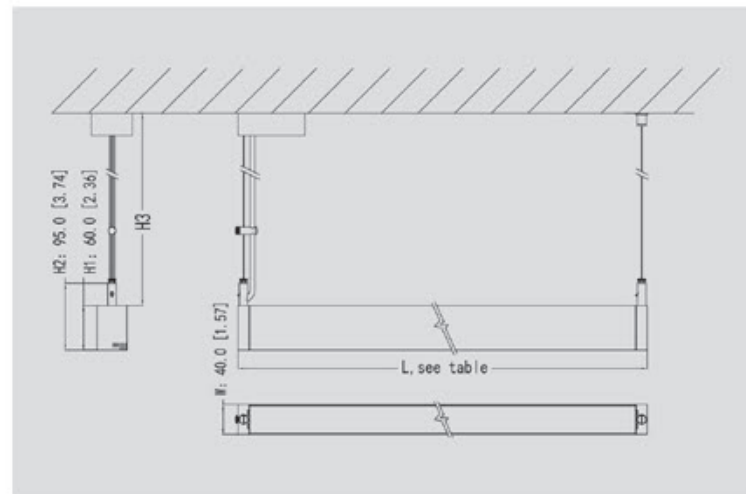


Dimension in millimetres [inches in brackets]  
Tolerance: ±1mm [0.04"]

## Distribution Flux Curve

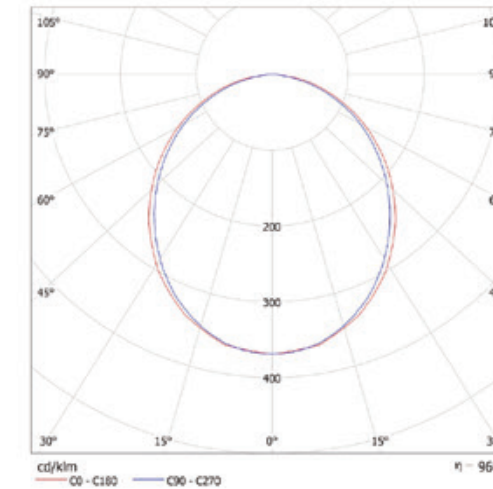

## Linkable Option

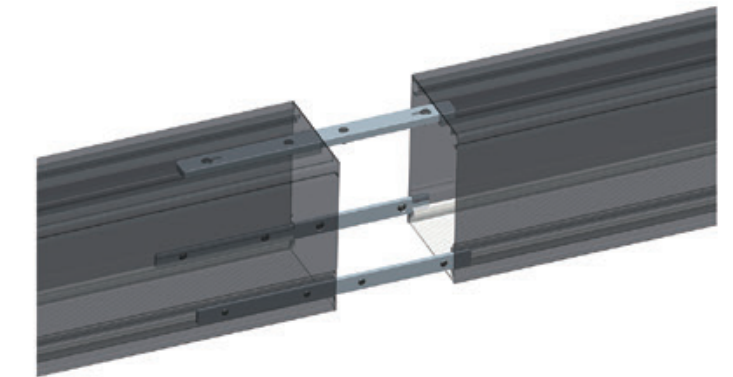

## Technical Data

Model	Shift Down	L70	60,000 hours
Light Source	15 to 30W SMD LED	IP Rating	IP20
Rated Life	50,000 Hours	Beam Angle	120°
Input Voltage / Power	120 - 240V AC / 15 - 30W	Dimming	1-10V, Switch and DALI available
Power Factor	0.90	Operating Temperature	-4°F to +122°F (-20°C to +50°C)
CRI / SDCM	90+ / 3-	Dimensions	L x 40mm x 60mm (H3: 3000mm)
L90	30,000 hours		L x 1.57" x 2.36" (H3: 118.11")

Model	Wattage	Lumens		Weight	* L, Length
		3000K	4000K		
01026060	15W	1,050	1,200	kg [lbs]	mm [inch]
01029060	20W	1,400	1,600	1.4 [3.1]	633 [24.92]
01021260	25W	1,750	2,000	1.7 [3.7]	933 [36.73]
01021560	30W	2,100	2,400	2.0 [4.4]	1233 [48.54]
				2.3 [5.1]	1533 [60.35]

\* Custom lengths are available on request

## Ordering Details

Model	Type	Size	Finish	CCT	Dimming
01 - Shift	02 - Down	<b>6060 -</b> L: 633mm [24.92"] H: 60mm [2.36"]	1 - Silver	2 - 3000K	0 - Non-dimmable
		<b>9060 -</b> L: 933mm [36.73"] H: 60mm [2.36"]	2 - White	4 - 4000K	1 - 1-10V Dimmable + Switch DIM
		<b>1260 -</b> L: 1233mm [48.54"] H: 60mm [2.36"]	3 - Black		2 - DALI Dimmable
		<b>1560 -</b> L: 1533mm [60.35"] H: 60mm [2.36"]			