

# SHIFT UP AND DOWN

## Application


Beautiful, slim LED luminaire that comes in many forms. Offered in a pendant, ceiling or wall luminaire. Housed in Aluminum with a matte anodized finish featuring the best in LED optic design. Shift is extremely versatile and it's timeless design lends itself to a variety of applications: residential, commercial and healthcare.

## Product Description

- Wire Suspended LED Pendant Luminaire
- Elegant and slim shape
- Aluminum Housing
- Replacable LED module
- Optical prism high transmittance PMMA diffusor
- 5 year warranty



## Dimensions

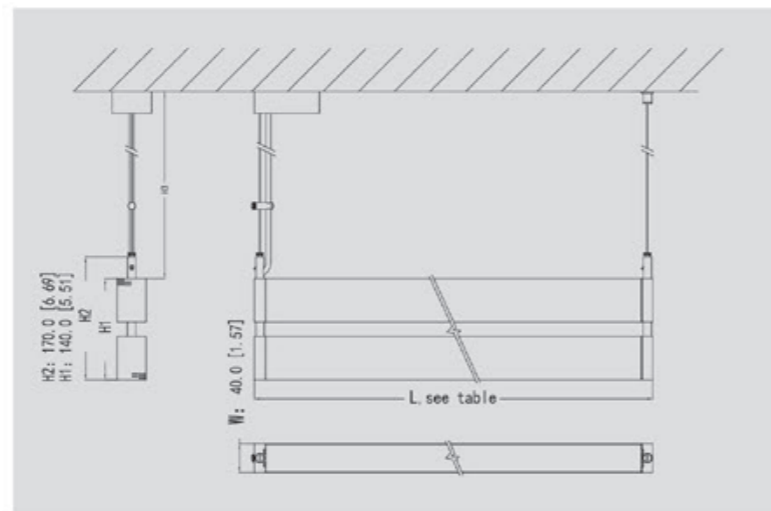

Dimension in millimetres [inches in brackets]  
Tolerance: ±1mm [0.04"]



## Technical Data

Model	Shift Up and Down	L70	60,000 hours
Light Source	SMD LED	IP Rating	IP20
Rated Life	50,000 Hours	Beam Angle	120°
Input Voltage / Power	120 - 240V AC / 30 - 60W	Dimming	1-10V, Switch and DALI available
Power Factor	0.90	Operating Temperature	-4°F to +22°F (-20°C to +50°C)
CRI / SDCM	90+ / 3-	Dimensions	L x 40mm x 140mm ( H3: 3000mm)
L90	30,000 hours		L x 1.57" x 5.51" ( H3: 118.11")

Model	Wattage	Lumens		Weight kg [lbs]	* L, Length mm [inch]
		3000K	4000K		
01056014	2 x 15W	2,100	2,400	2.8 [6.2]	633 [24.92]
01059014	2 x 20W	2,800	3,200	3.4 [7.5]	933 [36.73]
01051214	2 x 25W	3,500	4,000	4.0 [8.8]	1233 [48.54]
01051514	2 x 30W	4,200	4,800	4.6 [10.1]	1533 [60.35]

\* Custom lengths are available on request

## Ordering Details

Model	Type	Size	Finish	CCT	Dimming
01 - Shift	05 - Up and Down	<b>6014 -</b> L: 633mm [24.92"] H: 140mm [5.51"]	1 - Silver	2 - 3000K 4 - 4000K	0 - Non-dimmable 1 - 1-10V Dimmable + Switch DIM 2 - DALI Dimmable
		<b>9014 -</b> L: 933mm [36.73"] H: 140mm [5.51"]	2 - White		
		<b>1214 -</b> L: 1233mm [48.54"] H: 140mm [5.51"]	3 - Black		
		<b>1514 -</b> L: 1533mm [60.35"] H: 140mm [5.51"]			